



TXGN-JK-11 Product Data Sheet

**GSM Bendable Rubber Antenna
SMA-J Interface**

Chengdu Ziisor Technology Co., Ltd

I. Product Introduction


TXGN-JK-11 is a GSM bendable rubber antenna. Height of the antenna is 110mm. With a SMA-J interface (SMA inner screw thread and inner needle), it can be applied to such broadband communication system, WLAN and mobile terminal equipment with frequency of GSM as router, AP, radio station, WiFi, smart TV and so on.

II. Specification and Parameters

Physical Parameters	
Bandwidth	GSM
Gain	3dBi
SWR	≤1.5
Polarization	Vertical
Radiation Direction	Omnidirectional
Input Impedance	50 Ω
Power Capacity	20W
Other Parameters	
Height	110mm
Total Weight	8g
Coat Material	TPEE
Interface	SMA-J (SMA inner screw thread and inner needle)
Working Temperature	-40℃ ~ +85℃
Storage Temperature	-40℃ ~ +85℃



III. Testing

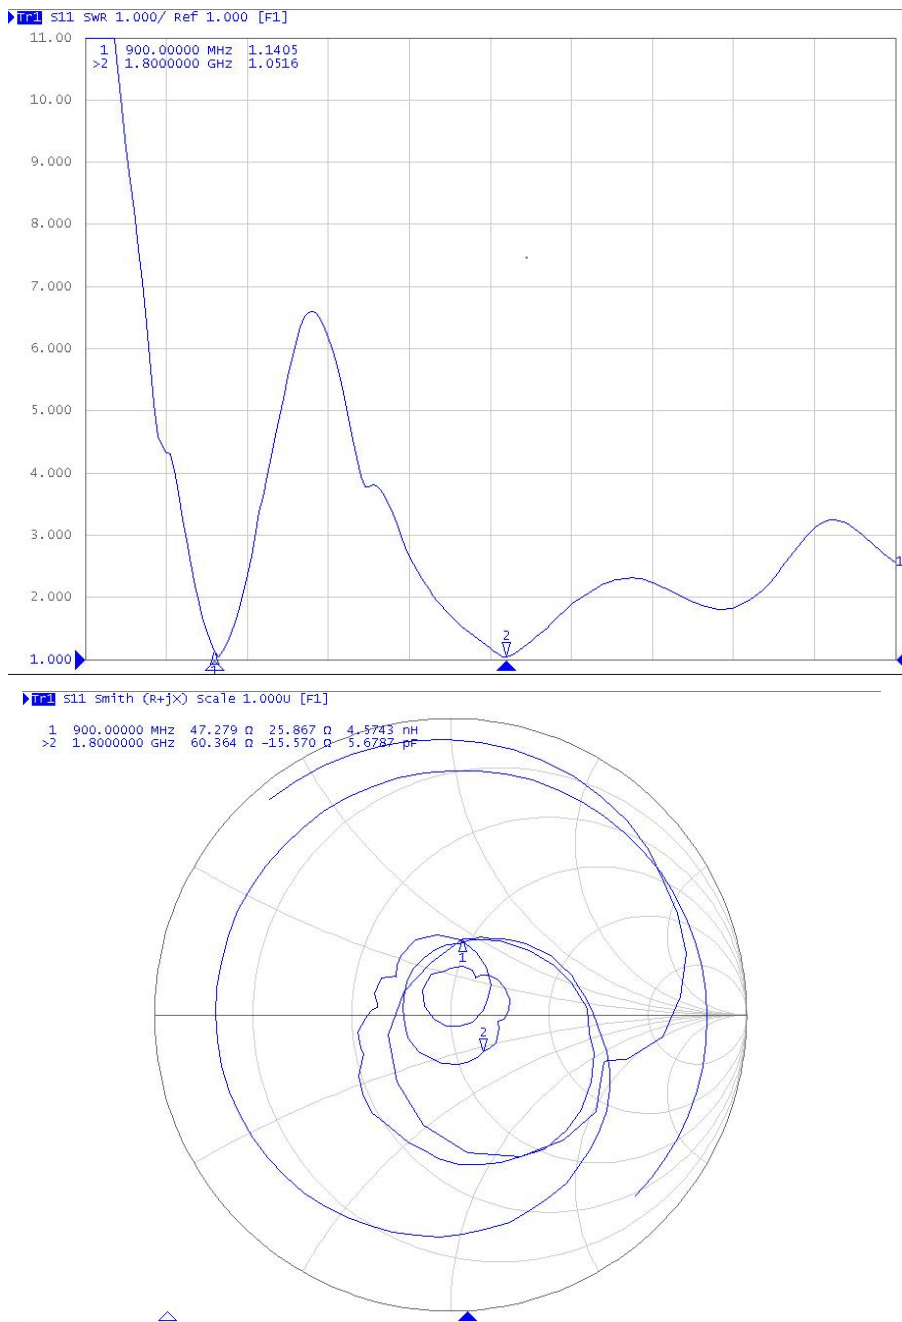

IV. FAQ

- Antenna frequency shall be matched with that of the wireless devices, or the communication will be affected;
- Diffraction performance will be better with lower communication frequency and longer wave;
- Communication distance will be shorter if there is any straight-line barrier;
- Please be noted of the antenna radiation direction. Incorrect direction by installation will result in short communication distance;
- As radio wave may be absorbed by the ground, result will be affected if tested close to ground. It is suggested to test at a higher place;
- As radio wave can be highly absorbed by the ocean water, result will be affected if tested close to the sea;
- Signal will be seriously weakened if the antenna is put close to metal or inside metal shell;
- Lower impedance matching of antenna and communication devices will result in bad communication.

Chengdu Ziisor Technology Co., Ltd

Tel: +86-028-61542639

Technical Support: support@ziisor.com

Website: www.ziisor.com

Address: B231 Innovation Center, No.4 Xixin Avenue, High-Tech Zone, Chengdu, Sichuan Province, China.

